



MSR 400 1CT

Product family description

MSR – bright vivid colors, alwaysThe high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Product Features

- Single ended lamp concept
- High CRI
- Daylight Colour Temperatures

Product Benefits

- Optimal light collection
- Excellent colour characteristics
- Brightness on stage

Application

- Theatre stages
- Discos
- Events
- Shows

Luminaires

- Must only be operated in closed luminaires, because of the high internal working pressure
- Luminaires must block the emitted UV radiation, with no radiation spill through ventilation slots

System


- Can be operated on an electronic power supply or a magnetic ballast-ignitor combination

Product data	
Order code	190277 45
Full product name	MSR 400 ICT
Packing type	1 Carton
Pieces per pack	1
Net weight per piece	0.050 KG
Successor order code	
System Description	Cold Strike
Cap-Base	GX9.5
Cap-Base Information	-
Execution	-
Operating Position	any
Main Application	Studio/Disco
Additional Information	-
Packing Type	ICT [1 Carton]
Packing Configuration	4
Life to 50% failures EM	1000 hr
Lamp Wattage	400W
Technical Type	400
Lamp Wattage Technical	400 W
Lamp Current	6.9 A
Color Code	-
Color Rendering Index	95 Ra8
Color Temperature	5900 K
Luminous Flux Lamp EM	32000 Lm
Luminous Efficacy Lamp EM	80 Lm/W




MSR 400, MSR 575/2


MSR GX9.5

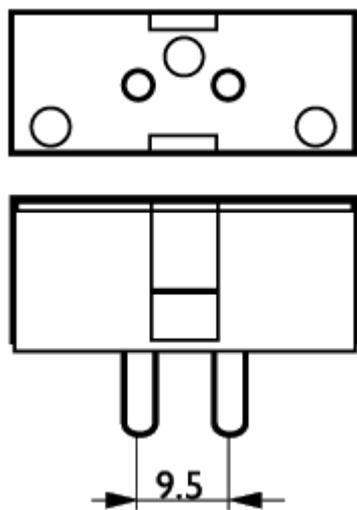


Cap-Base GX9.5

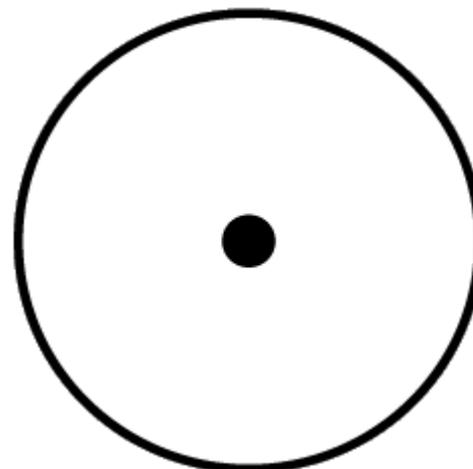


Operating Position any

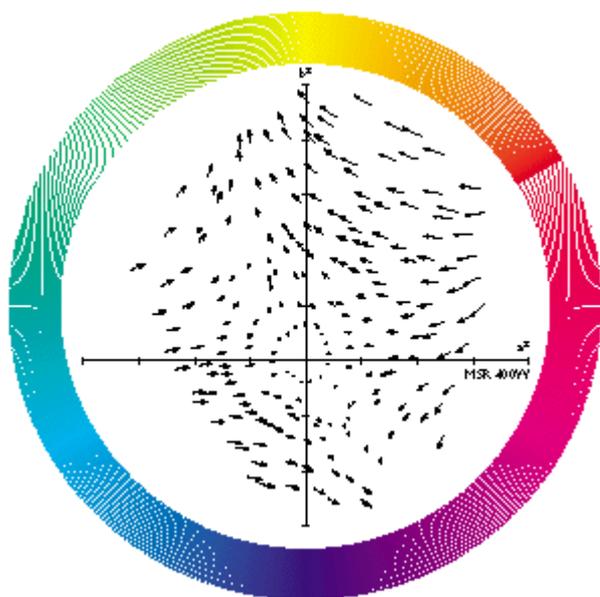


MSR 400W

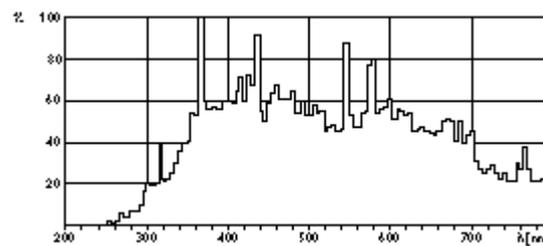

MSR CS

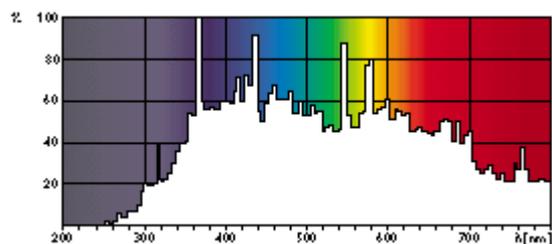

MSR CS

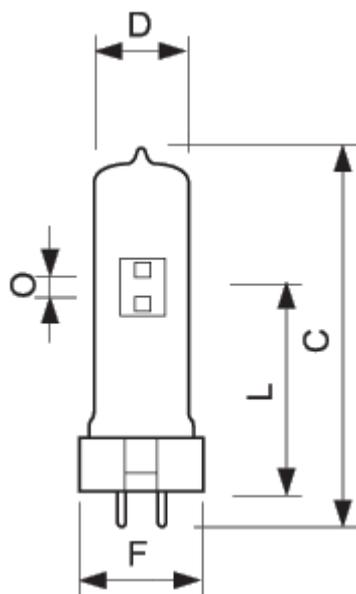

GX9.5

MSR

	A	A	A	A	A	A
Full product name	Min	Min	Nom	Nom	Max	Max
MSR 400W ICT	-	-	-	-	-	-

	C	C	D	D	D1	D1
Full product name	Max	Max	Max	Max	Nom	Nom
MSR 400W ICT	112	112	23	23	-	-

	F	F	F	F	F	F
Full product name	Min	Min	Nom	Nom	Max	Max
MSR 400W ICT	34	34	35	35	36	36

	L	L	L	L	L	L
Full product name	Min	Min	Nom	Nom	Max	Max
MSR 400W ICT	61	61	62	62	63	63

	O	O
Full product name	Nom	Nom
MSR 400W ICT	6.0	6.0



©2009 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Document order number : 0000 000 00000