



# MSR 1200 1CT

## Product family description

MSR – bright vivid colors, alwaysThe high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

## Product Features

- Single ended lamp concept
- High CRI
- Daylight Colour Temperatures

## Product Benefits

- Optimal light collection
- Excellent colour characteristics
- Brightness on stage

## Application

- Theatre stages
- Discos
- Events
- Shows

## Luminaires

- Must only be operated in closed luminaires, because of the high internal working pressure
- Luminaires must block the emitted UV radiation, with no radiation spill through ventilation slots

## System


- Can be operated on an electronic power supply or a magnetic ballast-ignitor combination

Product data	
Order code	189363 45
Full product name	MSR 1200 1CT
Packing type	1 Carton
Pieces per pack	1
Net weight per piece	0.150 KG
Successor order code	
System Description	Cold Strike
Cap-Base	G22
Cap-Base Information	30x53mm
Execution	-
Operating Position	any
Main Application	Studio/Disco
Additional Information	-
Packing Type	1CT [1 Carton]
Packing Configuration	4
Life to 50% failures EM	800 hr
Lamp Wattage	1200W
Technical Type	1200
Lamp Wattage Technical	1200 W
Lamp Current	13.8 A
Color Code	-
Color Rendering Index	80 Ra8
Color Temperature	5900 K
Luminous Flux Lamp EM	110000 Lm
Luminous Efficacy Lamp EM	91 Lm/W




MSR 700 (/2), MSR 1200 (/2)


[MSR 1200W/700W -](#)

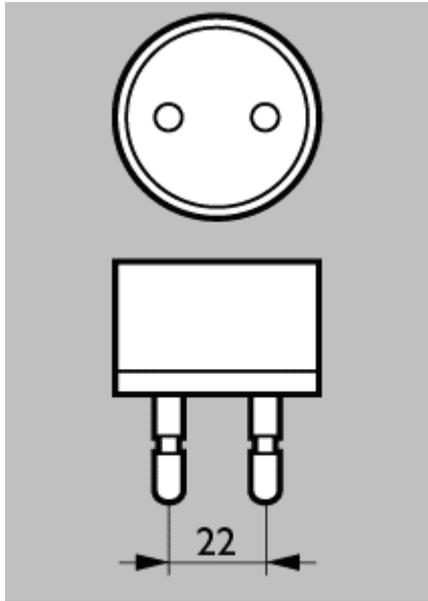


Cap-Base G22

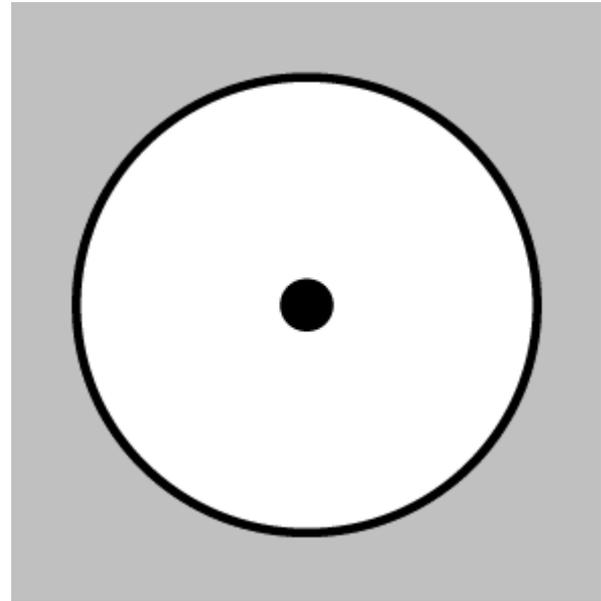


Operating Position any

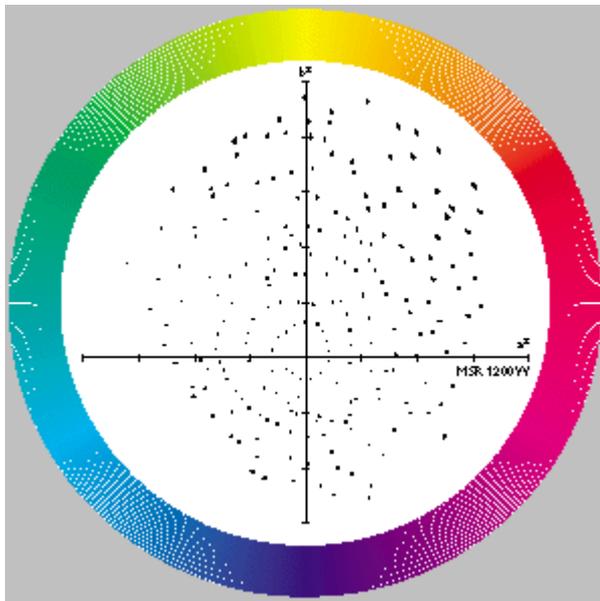


MSR 1200W

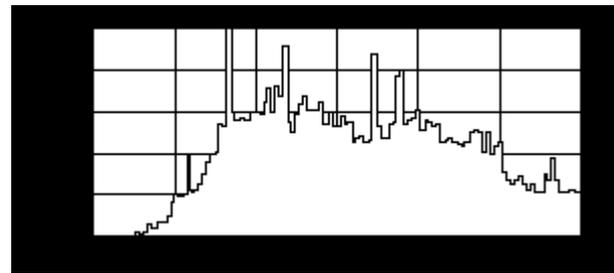

MSR CS

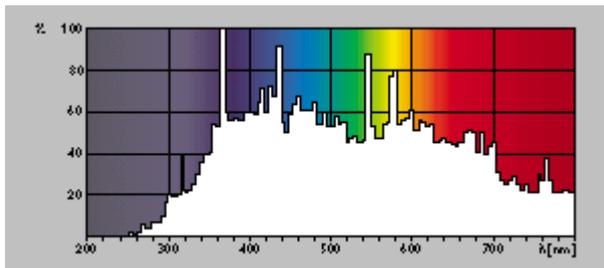

MSR CS

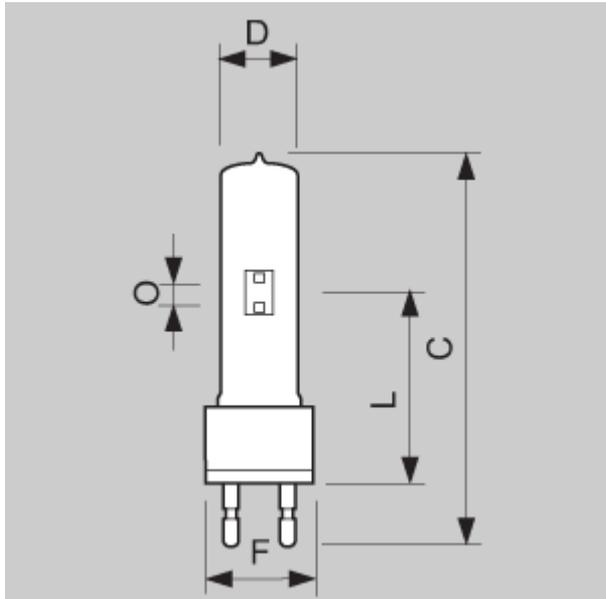

G22

MSR

	A	A	A	A	A	A
Full product name	Min	Min	Nom	Nom	Max	Max
MSR 1200 W 1CT	-	-	-	-	-	-

	C	C	D	D	D1	D1
Full product name	Max	Max	Max	Max	Nom	Nom
MSR 1200 W 1CT	175	175	40	40	-	-

	F	F	F	F	F	F
Full product name	Min	Min	Nom	Nom	Max	Max
MSR 1200 W 1CT	-	-	-	-	-	-

	L	L	L	L	L	L
Full product name	Min	Min	Nom	Nom	Max	Max
MSR 1200 W 1CT	84	84	85	85	86	86

	O	O
Full product name	Nom	Nom
MSR 1200W 1CT	10.0	10.0



©2009 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Document order number : 0000 000 00000