

Part number

PEW 12565 PI



Brief description:

bulkhead mounting housings, sockets, 3 poles + N + PE, 125 (A.C.), 346 ÷ 415V, 6 red, inclined, IP67

Product description

Model	sockets
Version	PLUSO, plugs and socket-outlets
Series	PEW...PI
Product type	flush-mounting
Style	inclined
Family	plugs and socket-outlets
N. of poles	3 poles + N + 
Clock position	6

Technical data

Current	125 A
Voltage	200/346 ÷ 240/415 V
Frequency	50 and 60 Hz.
Operating temperature range (min, max)	-40°C ... +125°C
Material	thermoplastic
IP degree of protection	IP67

Further technical details

Weight	1.577,00 g
---------------	------------

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

Quality mark	
---------------------	---

General ordering information

EAN13 code	8015747070522
-------------------	---------------

Packaging Information

Packaging length	150,00 mm
Packaging height	140,00 mm
Packaging width	180,00 mm
Packaging weight	15,00 kg
Packaging volume	3,78 dm ³
Packaging description	Carton box
Packaging quantity	8 Pcs
Packaging EAN code	8015747099219
Sub-packaging weight	1,88 kg
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747099226


Part number

PEW 12565 PI



Catalogue drawings

(63 /125A) PEW ... PI

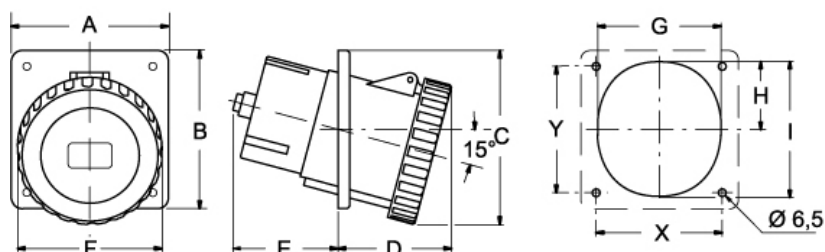

PEW ... PI	A	B	C	D	E	F	G	H	I	X	Y
63A 2P+⊕	100	107	124	84	55	107	82	45	94	77	85
3P+⊕	100	107	124	84	55	107	82	45	94	77	85
3P+N+⊕	100	107	124	84	55	107	82	45	94	77	85
125A 2P+⊕	130	130	143	94	87	119	102	56	112	104	104
3P+⊕	130	130	143	94	87	119	102	56	112	104	104
3P+N+⊕	130	130	143	94	87	119	102	56	112	104	104

Notes

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PI types (IP44), spring lid
- PEW...PI types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)